

## 400 Line 400lt Line Freezer, 1 Door (White)



**730193 (R04FSFW)**

1-door freezer 400lt, -15-24°  
C, prepainted white

**730105 (R04FSFW6)**

1-door Freezer 400lt, -15-24°  
C, prepainted white

### Short Form Specification

#### Item No.

Exterior in white painted steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged full door with lock and heated frame, reversible on-site. Built-in refrigeration unit; manual defrost; digital control and temperature display; multiple evaporating grids. For ambient temperatures up to 38 °C. HCFC, CFC and HFC free insulation and R404a refrigerant gas. With 2 front feet and 2 back wheels. Supplied with n. 4 evaporating grids.

### Main Features

- CFC and HCFC free (ecological refrigerant type: R404a, gas in foam: cyclopentane).
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket. (only for 730193)
- Very quiet operation.
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Suitable for use in ambient temperatures of up to 38 °C.
- Model requires only 1 phase 220V-60Hz supply and can be plugged straight into an existing power socket. (only for 730105)
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory). (only for 730105)

### Construction


- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.

### Optional Accessories


- Pvc container with false bottom PNC 881072  for 400lt

APPROVAL: \_\_\_\_\_

Front

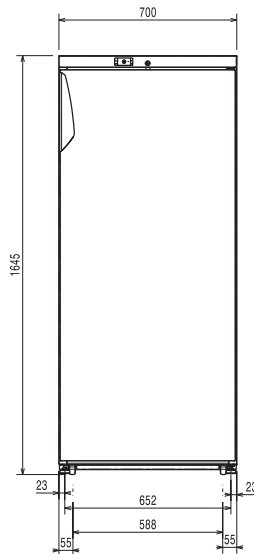


Side

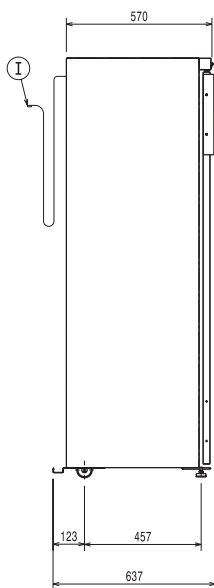

EI = Electrical inlet (power)

Top

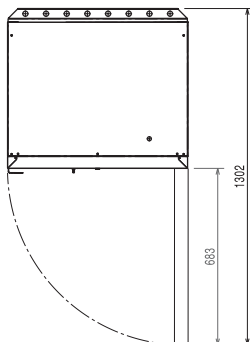
**Electric**
**Supply voltage:**

730193 (R04FSFW)	230 V/1 ph/50 Hz
730105 (R04FSFW6)	220-230 V/1 ph/60 Hz

**Electrical power max.:**

730193 (R04FSFW)	0.8 kW
730105 (R04FSFW6)	0.48 kW

**Key Information:**

Gross capacity:	400 lt
Net Volume:	
Door hinges:	Right Side
External dimensions, Width:	700 mm
External dimensions, Depth with Doors Open:	1310 mm
External dimensions, Height:	1645 mm
Noise level:	56 dBA
Number and type of grids (included):	- ;600x400
Type of external material:	Prepainted Steel
External door material:	Prepainted Steel

**Refrigeration Data**

Control type:	Digital
Compressor power:	1/2 hp
Refrigerant type:	R404A
Refrigeration power:	
730193 (R04FSFW)	780 W
730105 (R04FSFW6)	712 W
Refrigeration power at evaporation temperature:	
730193 (R04FSFW)	-29 °C
730105 (R04FSFW6)	-23.3 °C
Refrigerant weight:	240 g
Operating temperature min.:	-24 °C
Operating temperature max.:	-15 °C
Operating mode:	Static
Cooling unit:	Built-In
Defrost type:	Manual

**Product Information (EU Regulation 2015/1094)**

Type of model: