

Hand held Mixers

Speedy Mixer portable mixer 250 W

Variable speed with Stainless Steel Tube



600021 (SMVT20W25)

Portable mixer 250 W
 variable speed - stainless
 steel tube 200 mm - 230
 V/1N/50-60

600022 (SMVT25W25)

Portable mixer 250 W
 variable speed - stainless
 steel tube 250 mm - 230
 V/1N/50-60

Short Form Specification

Item No. _____

Handheld mixer with stainless steel tube. To be used directly in stew pots. Motor unit and tube can be easily removed without tools to facilitate cleaning. Incorporates a convenient grip for less fatigue. Variable speed: up to 15000 rpm.

Main Features

- Ideal to process small quantities (less than 35 lt).
- Very easy to use, convenient and ergonomic grip reduces fatigue while working.
- Delivered with:
 - Choice of stainless steel tube: 200 mm or 250 mm, depending on model
 - Cord and plug supplied as standard
- Its light weight ensures an optimum comfort for the user.
- Blade protection lip designed to offer a more efficient use and reduce work times.
- Easy to dismantle, the motor unit and the tube can be disassembled without the use of tools.
- Safety feature requires both hands to start the mixer (no volt release system).
- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.


Construction

- Tube, knife and bell in stainless steel for an easier and safer cleaning process.
- Compact design, created to be used directly in stew pots even during cooking and ideal for small quantities.
- Variable speed from 2500 to 15000 rpm to make preparation tasks fast and easy.
- Motor protected from overload by a double insulation.
- Power: 250 watts.
- IPX3 protected.
- Tube and knife are dishwasher-safe.

Optional Accessories

- Whisk tool for speedy mixer (variable speed models only) PNC 650057
- Stainless steel tube for Speedy mixer, 20 cm PNC 650187
- Stainless steel tube for Speedy mixer, 25 cm PNC 650188
- Wall support for speedy mixer PNC 653090
- Tube for emulsions for speedy mixer, 25cm PNC 653098

APPROVAL: _____

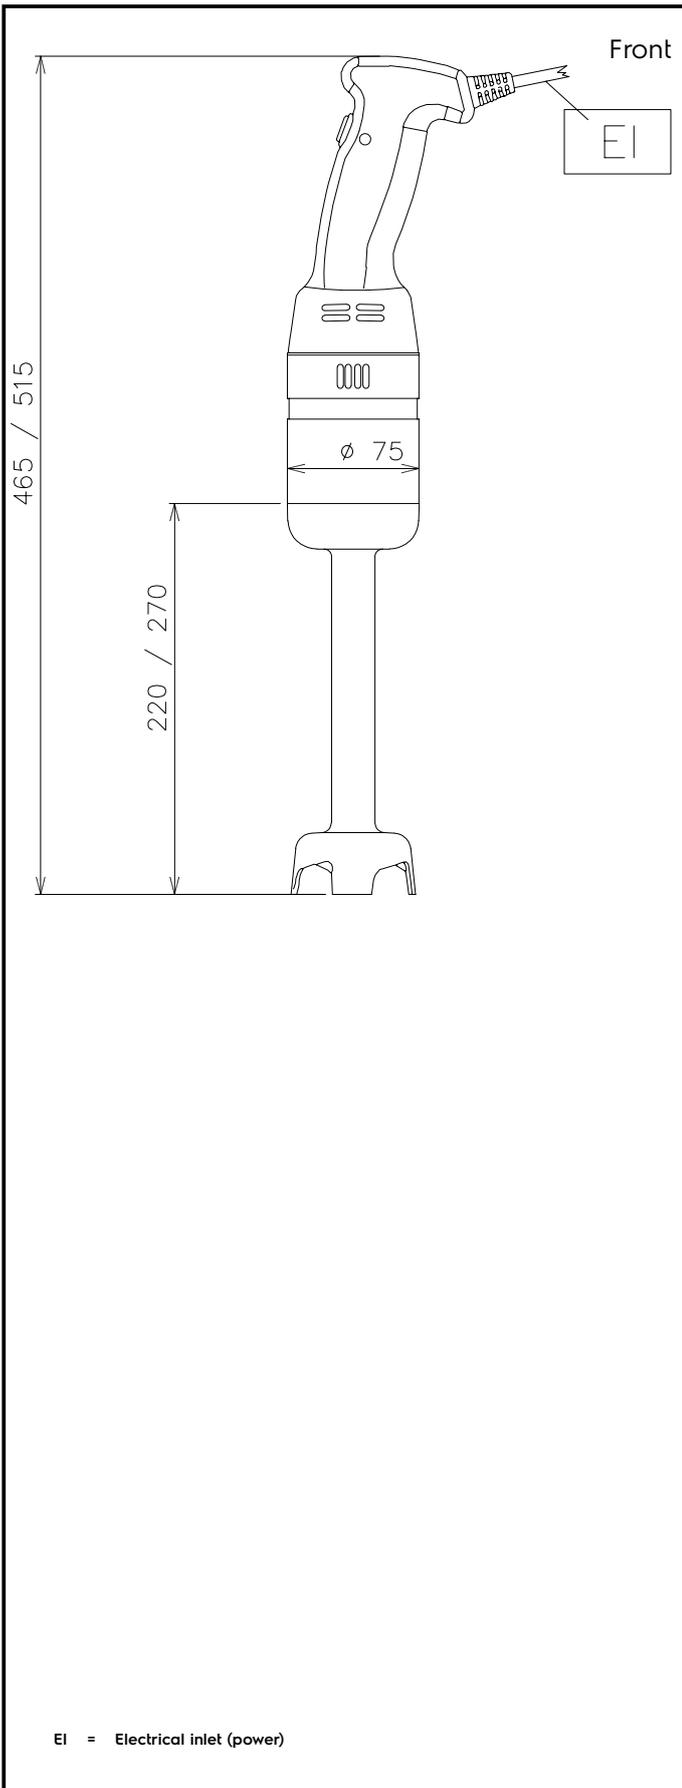

Electric

Supply voltage:

600021 (SMVT20W25) 230 V/1N ph/50 Hz

600022 (SMVT25W25) 230 V/1N ph/50 Hz

Electrical power max.:

0.25 kW

Total Watts:

0.25 kW

Key Information:

External dimensions, Width: 110 mm

External dimensions, Depth: 75 mm

External dimensions, Height:

600021 (SMVT20W25) 470 mm

600022 (SMVT25W25) 520 mm

Shipping weight:

600021 (SMVT20W25) 1.83 kg

600022 (SMVT25W25) 1.88 kg